


SLIDING WINDOWS AND DOORS

Ponizio SL1600ttHI

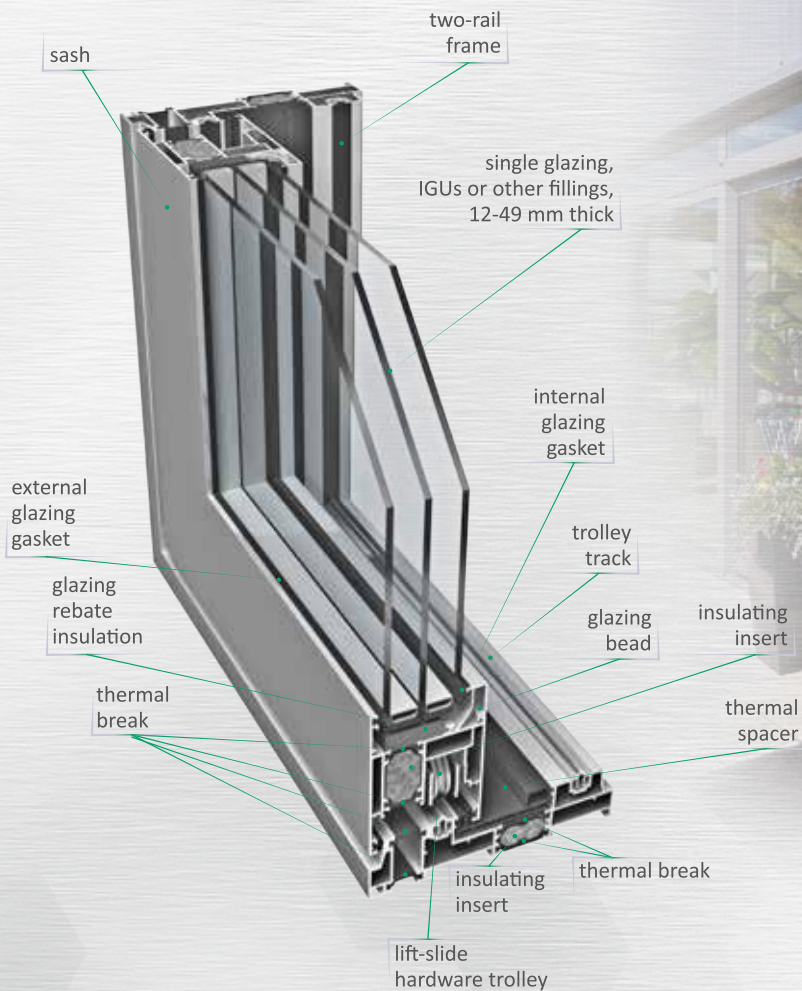

$$U_w = 1.0 \text{ W/m}^2\text{K}$$


*reference construction dimensions:
L 2400 x H 2400 mm, $U_g = 0.5 \text{ W/m}^2\text{K}$,
triple glazing

A variant of the SL1600tt lift-slide system, designed for the construction of high thermal performance aluminium joinery.

- ♦ PLUS version: U_f frame heat transfer coefficient as low as $2.1 \text{ W/m}^2\text{K}$
- ♦ HI versionL: U_f frame heat transfer coefficient as low as $1.8 \text{ W/m}^2\text{K}$

SLIDING WINDOWS AND DOORS

Ponizio SLI600ttHI

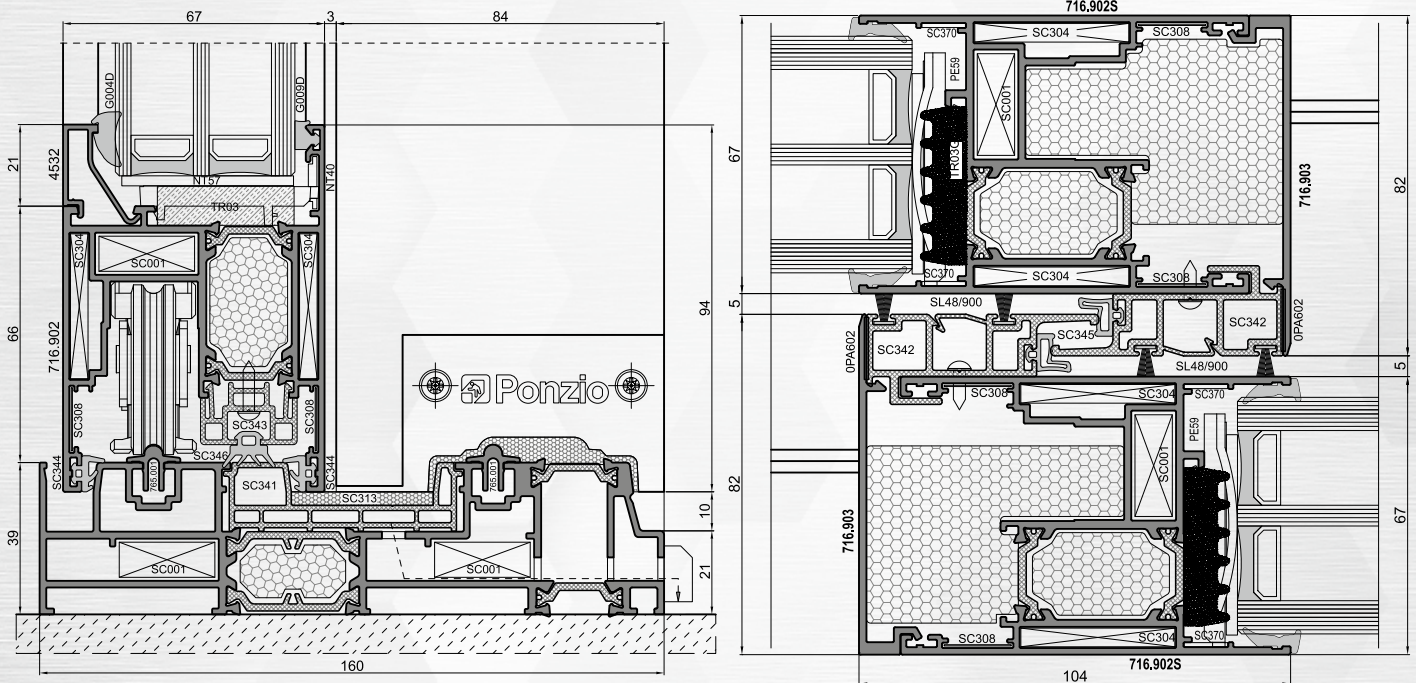

Technical parameters

Filling thickness	»» 12-49 mm
Sash depth	»» 67 mm
Frame depth	»» 160/154 mm two-rail frame 247/241 mm three-rail frame
Maximum sash dimensions	»» L 1800 x H 3200 mm
Maximum sash weight	»» 300/400 kg
Air permeability	»» class 4
Watertightness	»» class 9A
Resistance to wind load	»» class C3/B5
Thermal insulation	»» U_f from 1.8 W/m ² K U_w from 1.0 W/m ² K
Certification	»» ITT in acc. with PN - EN 14351-1 + A1
Resistance to burglary	»» class RC2 in acc. with PN - EN 1627