

TM  
**102**  
HI

## HIGHEST THERMAL INSULATION PARAMETERS

### TM 102HI - SYSTEM FEATURES

YAWAL TM 102HI System is dedicated to energy-saving and passive buildings.

This system will work in public utility buildings and in residential buildings. It is a well-developed system of aluminium profiles used to manufacture modern types of windows, doors and display windows that require high thermal insulation properties. The modern construction of the sash, with insulator angled with respect to the frame, provides beneficial distribution of forces within the profile.



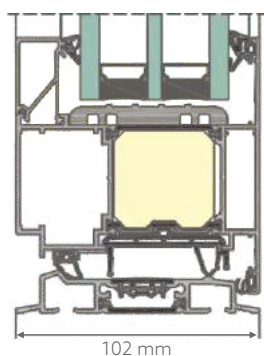
Due to the above, manufacturing of highly durable profiles was possible, and that, in turn, allowed for creating constructions of large dimensions and significant weight. As a part of this system, we offer wide range of glazing and the possibility of installing all types of two-chamber or three-chamber glass panes available on the market.

Photo: Kindergarten nr 10, Myslowice / Design: Usługi Projektowe Paweł Drabik  
Aluminium manufacturer: For-Bud, Krzepice

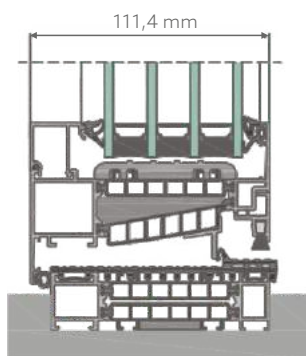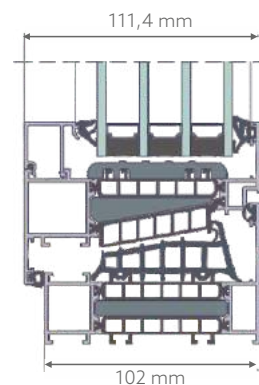

## ADVANTAGES OF THE SYSTEM

- possibility of using full range of fittings available at the market: surface fittings ALU, groove type PCV, hidden hinges, handles with spindles - of any shape, stainless handles,
- excellent level of energy-saving and very high water-tightness due to innovative central seal construction,
- modern design of lock profiles in combination with the new gaskets allows for creating one uninterrupted surface of aluminium and gaskets,
- possibility of manufacturing glazing reversible profile,
- possibility of creating large - dimension structures,
- possibility of making balcony door with low threshold,
- possibility of manufacturing the window with a movable mullion,
- additional wind insulation due to application of gasket at the contact point of glazing bead and profile,
- possibility of combination with other Yawal systems.

CROSS SECTION OF  
DOOR THRESHOLDCROSS SECTION OF LOW  
THRESHOLD WINDOW TM 102HICROSS SECTION OF  
WINDOW TM 102HI

## TECHNICAL PARAMETERS - TM 102HI

Air permeability	class 4 (600 Pa)
Water tightness	class AE1800 (1800 Pa)
Heat transfer coefficient	$U_f$ = from 0,45 W/m <sup>2</sup> K
Acoustic insulation	39÷48 dB acc. to PN-EN ISO 140-3
Anti-theft protection	RC2
Wind load resistance	class C5 (2000 Pa)

## SYSTEM CHARACTERISTICS

Window structural depth	Frame profile	102 mm
	Sash profile	111,4 mm
Acceptable thickness of infills	Frame profile	35÷69 mm
	Sash profile	44÷72 mm
Acceptable leaf dimensions	Width	1600 mm
	Height	3000 mm
Max leaf weight		300 kg